



SINGLE-ROOM MINI-SPLIT SYSTEMS

9k and 12k BTU Systems

Systems: 09LMAS, 12LMAS, 09LMAS1, 12LMAS1

- ✓ **DURABILITY**
- ✓ **RELIABILITY**
- ✓ **QUALITY**

BUILT IN FILTRATION




LONG-LIFE ION DEODORIZATION FILTER

The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultrafine particle ceramic. The filter can be used for approximately 3 years if it is washed with water when dirty to restore its surface action.



APPLE-CATECHIN FILTER

Dust, mold spores and micro-organisms are absorbed onto the filter by static electricity and growth is inhibited and deactivated. Filter lasts 3-12 months.

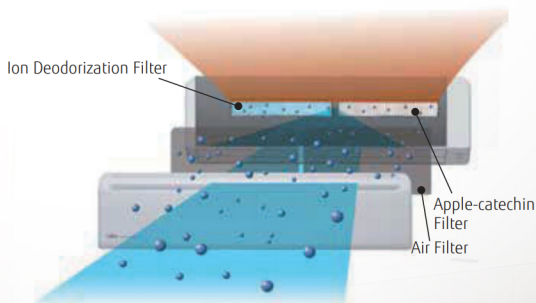

Up to
26.5 SEER




Please complete product registration at www.fujitsugeneral.com
to validate your new warranty.


OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER
www.oldachpr.com

Dimensions (inches)

ASUG09LMAS, ASUG12LMAS

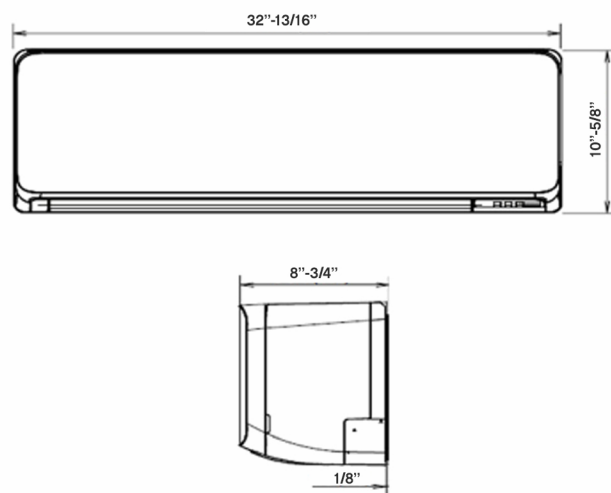

AOUG09LMAS1, AOUG12LMAS1

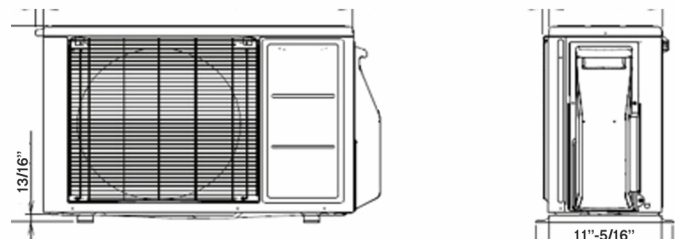

Standard Features

- | | |
|----------------------|---------------------------------------|
| Sleep Timer | Economy Mode |
| 24 Hour Timer | Quiet Mode (Indoor) |
| Weekly Timer | Auto Restart/Reset |
| Dry Mode | Auto Changeover |
| Auto Mode | Remote Temp. Sensor* |
| Auto Louver: Up/Down | 3 rd Party Device Control* |
| Daisy Chain | |

* Available only with optional wired remote controller and optional interface kit.

+ Available only with optional interface kit. Operation monitoring and On/Off control only.

ENERGY STAR is a registered trademark of the EPA and DOE. Copyright 2015 Fujitsu General America, Inc.

Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information without notice and without incurring any obligations.

UP TO 26.5 SEER		9LMAS1	12LMAS1
Performance			
Nominal Cooling	Btu/h	9,000	12,000
Min.-Max. Cooling	Btu/h	3,400-10,900	3,400 ~ 13,300
SEER	Btu/h	26.5	23
EER	Btu/h	14.3	12.5
Cooling Operation Range	F	14 ~ 115	14 ~ 115
Moisture Removal	Pt./h	2.7	3.8
Fan - Air Circulation			
Hi	CFM	453	
Medium	CFM	353	
Low	CFM	265	
Quiet	CFM	147	
Fan Speed Stage		4+ Auto	
Indoor Sound Level			
Hi	dB(A)	43	
Medium	dB(A)	36	
Low	dB(A)	30	
Quiet	dB(A)	19	
Outdoor Sound Level Clg/Htg	dB(A)	46	49
Electrical			
Voltage/Frequency/Phase		208-230/60/1	
Circuit Breaker	Amps	15	
Current Rated/Max: Cooling	Amps	3.1	4.7
Power Use Rated/Max: Cooling	kW	0.63	0.96
Size & Weight			
Net Weight Indoor	lbs.	22	
Net Weight Outdoor	lbs.	68	
Indoor Unit (HxWxD)	inch	10-5/8x32-13/16x8-3/4	
Outdoor Unit (HxWxD)	inch	21-5/16x31-7/16x11-7/16	
Refrigeration		R410A	
Additional Data			
Air Direction: Horizontal		Manual	Manual
Vertical		Automatic	Automatic
Air Filter		Washable	Washable
Minimum Lineset Lenght	Ft	10	10
Maximum Lineset Lenght	Ft	66	66
		(pre-charge: 49')	(pre-charge: 49')
Max. Vertical Diff.	Ft	49	49
Lineset Size Indoor	Inch	suc. 3/8	suc. 3/8
Lineset Size Outdoor	Inch	dis. 1/4	dis. 1/4



Optional Accessories

- Wired Remote Controller (Touch Panel): UTY-RNRUZ4
- Simple Remote Control (Hospitality): UTY-RHRY
- Simple Remote Control: UTY-RSRY
- Interface Kit: UTY-TWRXZ2
- Dry Contact Wire Kit: UTY-XWZXZ5
- 3rd Party Thermostat Converter: UTY-TTRZ



Fujitsu Limited Warranties for Residential Products

Extended 12-12 Warranty
Available through qualified contractors

FUJITSU AIRSTAGE
Air Conditioning Systems

OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER
www.oldachpr.com